

Command-type TFT-LCD Module

Low-end series 7.0 inch

RoHS

■ Features



This TFT-LCD module/control board displays content, including stored JPEG images and text with internal fonts, by way of a simple command set.

■ Specifications


Item \ Series		LC070LA1NA	LC070LA1NB	LC070LA1RA	LC070LA1RB	AH151CA	AH151CD	AH151CB	AH151CE
LCD panel	Display size class [inch]	7.0							
	Pixels [dot]	800 × 480 (WVGA)							
	Active area [W×H mm]	154.08 × 85.92							
	Luminance [c/m ²]	550	430	550	430				
	Viewing angles [deg]	Bottom = 60, Top = 60, Left = 70, Right = 70							
	Backlight type	LED							
	LED lifetime [h] ※1	min. 20,000							
Interface		USB2.0 Full Speed	RS232C (115.2 kbps max.)	USB2.0 Full Speed	RS232C (115.2 kbps max.)	USB2.0 Full Speed	RS232C (115.2 kbps max.)	USB2.0 Full Speed	RS232C (115.2 kbps max.)
Touch panel	Type	—		resistive		—		resistive	
	Active area [W×H mm]	—		155.08 × 86.92		—		155.08 × 86.92	
	Surface durability [touches]	—		1,000,000		—		1,000,000	
	Surface hardness	—		3H		—		3H	
Character		Japanese(kanji, katakana, hiragana, alphanumeric)							
Font code		FA UD Gothic-R							
Internal memory for screen images	Full screen JPEGs	50 (256 kB / 1 JPEG)							
	Partial screen JPEGs	200 (64 kB / 1 JPEG)							
Supply voltage [V]		5.0							
Power consumption [W]		3.5							
Operating temperature [°C]		-20 ~ +70				0 ~ +40			
Storage temperature [°C]		-30 ~ +80				-30 ~ +70			
Operating temperature [%RH]		10 ~ 80 (no condensation)							
Storage temperature [%RH]		10 ~ 90 (no condensation)							
Outer dimension [W×H×T mm]		167 × 102.3 × 14.4				190 × 122 × 21			
Weight [g]		approx. 330				approx. 580			
Case (with / without)		without case				with case			
Attaching method		—				VESA (50 × 50 mm)			

※1: LED lifetime = hours for the module luminance to decrease to 50% of original measured brightness at Ta = 25°C.

■ Appearance, outer dimensions

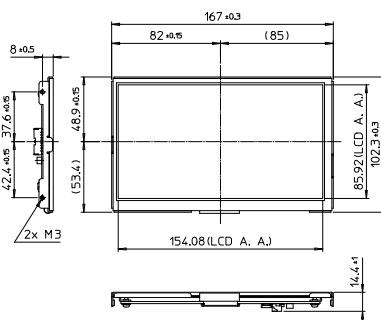

LC070LA1RA, B

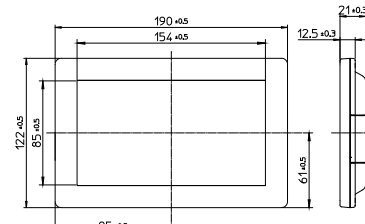

AH151C*

<Contact>

Futaba Corporation Tokyo Sales Office oak kandakajicho Bldg. 8F, 3-4 Kandakaji-cho Chiyoda-ku, Tokyo, 101-0045, Japan
TEL : 81-43-296-5112 FAX : 81-43-296-5122

URL <http://www.futaba.co.jp/>