

BLA21-28U-A01 Technical Specification



Model	Features
BLA21-28U-A01	Supports DroneCAN v1

■Caution

- This product **SHOULD NOT** be used for the devices that is directly related to human life.
- The application of this product as a weapon of mass destruction is banned, and for military use, it is confined to defense purposes in regions with no security risks.
- Keep the servo away from an object which produces a strong magnetic field.
There is a possibility of malfunction if the servo is affected by a strong magnetic field.
- Specifications and appearance of hardware/software and accessories are subject to change without notice for improvement.
- When disposing of this product, please comply with the relevant laws and regulations of each country and dispose of it as industrial waste.
- Do not insert or remove connectors while the power is on. Always turn off the power before connecting or disconnecting any connector.
- If you use this product in a vibrating environment, please check the connectors regularly to ensure they have not become loose.

Basic specifications


Item		Specification				Remarks		
Rated Voltage	typical	28.0			V	DC power supply.		
	range	24.0	~	28.0	V	DC power supply.		
Operating Voltage		20.0	~	32.0	V	DC power supply.		
Standby Current		≤ 37			mA	at 28.0V		
Starting Current ^{*1}	Design value	≤ 5			A	at 28.0V		
		3.2			A	100% of torque control. See each signal specification.		
Consumption Current ^{*1,*2}		80			mA	at 28.0V , No-load		
Max Torque ^{*1,*2}		4.51			N·m	at 28.0V	Applying this torque value for more than 1 second may cause damage.	
		46.0			kgf·cm			
		638.7			ozf·in			
		4.31			N·m	at 24.0V		
		4.71				at 32.0V		
Rated Torque ^{*1,*2}		1.47			N·m	at 28.0V	Please use at or below this torque.	
		15.0			kgf·cm			
		208.2			ozf·in			
		1.36			N·m	at 24.0V		
		1.47				at 32.0V		
Rotation Time ^{*1}		0.07			s/60°	at 28.0V	This unit is commonly used as the speed unit for RC servos.	
		0.08				at 24.0V		
		0.06				at 32.0V		
Speed with no load ^{*1,*2} (Angle control mode)		857			°/s	at 28.0V		
		143			min ⁻¹			
Speed with no load ^{*1,*2} (Speed control mode)		143			min ⁻¹	at 28.0V		
Rotation Angle ^{*1}	Range	Mechanical	179.9 ~ -180.0			°	Absolute	
		Software	-	36,000,000 ~			°	Pseudo absolute *Incremental above mechanical range.
	Accuracy	±3.0			°	Standard value	at 28.0V, No- Load, Position:±60°	
		±1.5				Measured value		
Direction ^{*1}		CW : Rotation Angle > 0 (+) CCW : Rotation Angle < 0 (-)				Based on the top surface of the servo (the side with the nameplate).		
BackLash ^{*1}		≤ 0.50			°			
Temperature Range	Operating	-40	~	70	°C	-40 °F ~ 158 °F		
	Storage	-40	~	80	°C	-40 °F ~ 176 °F		
Over heat protection		80			°C	The default temperature to activate the self-protection function “Torque OFF” in order to prevent overheat. The temperature can be set from 20° C to 80°C on the Signal line ^{*3} and on the program tool additionally provided by Futaba.		
		176			°F			

^{*1} At 23±5°C (Initial Performance Data)

^{*2} Each value is typical.

^{*3} The signal used for configuration varies depending on the model.


Mechanical specifications

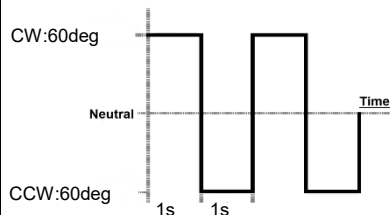Item	Specification						Remarks
Outer Dimension	48.0	×	21.0	×	51.5	mm	See below Outer Dimension
	1.89	×	0.83	×	2.03	inch	
Weight	130					g	with Horn and screws
	4.59					oz	without cables
IP Code	IP67					Waterproof and Dustproof	
Case Material	Upper		Aluminium			Surface: Anodizing	
	Middle		Aluminium			Surface: Anodizing	
	Bottom		Aluminium			Surface: Anodizing	
Gear Set Material	Steel					Surface: Hardening treatment	
Gear bearing	8				ball bearing	Assembled to the final gear	
Output Shaft	Serration S6L					Size: φ6mm, 25 teeth	
Radial load	100				N	Load position : Refer to Outer Dimension	
Position Sensor	Magnetic Encoder						
Motor Type	Brushless DC Motor						
MTTF ^{*1}	Operating time (Inquire for the test report)		1,000		h	Operating Condition ▪ at 28.0V ▪ ±60°, 0.5Hz sweep Test Condition ▪ Load : Rated Torque (Powder Brake)	
			7,200,000		cycle	<u>Angle Command Value</u> 	
Vibration Resistance ^{*1}	Operating time (Inquire for the test report)		≧	500	h	Operating Condition ▪ at 28.0V ▪ ±60°, 0.5Hz sweep ▪ No-Load	
						<u>Test Condition(sine wave)</u> •Frequency: 10 to 500Hz (sweep 1oct/min, amplitude limit 2mm) •Acceleration : 300m/s ² •Vibration axis : X,Y,Z	

*1 At $23\pm 5^\circ\text{C}$ (Initial Performance Data)

Outer Dimension


(unit : mm)

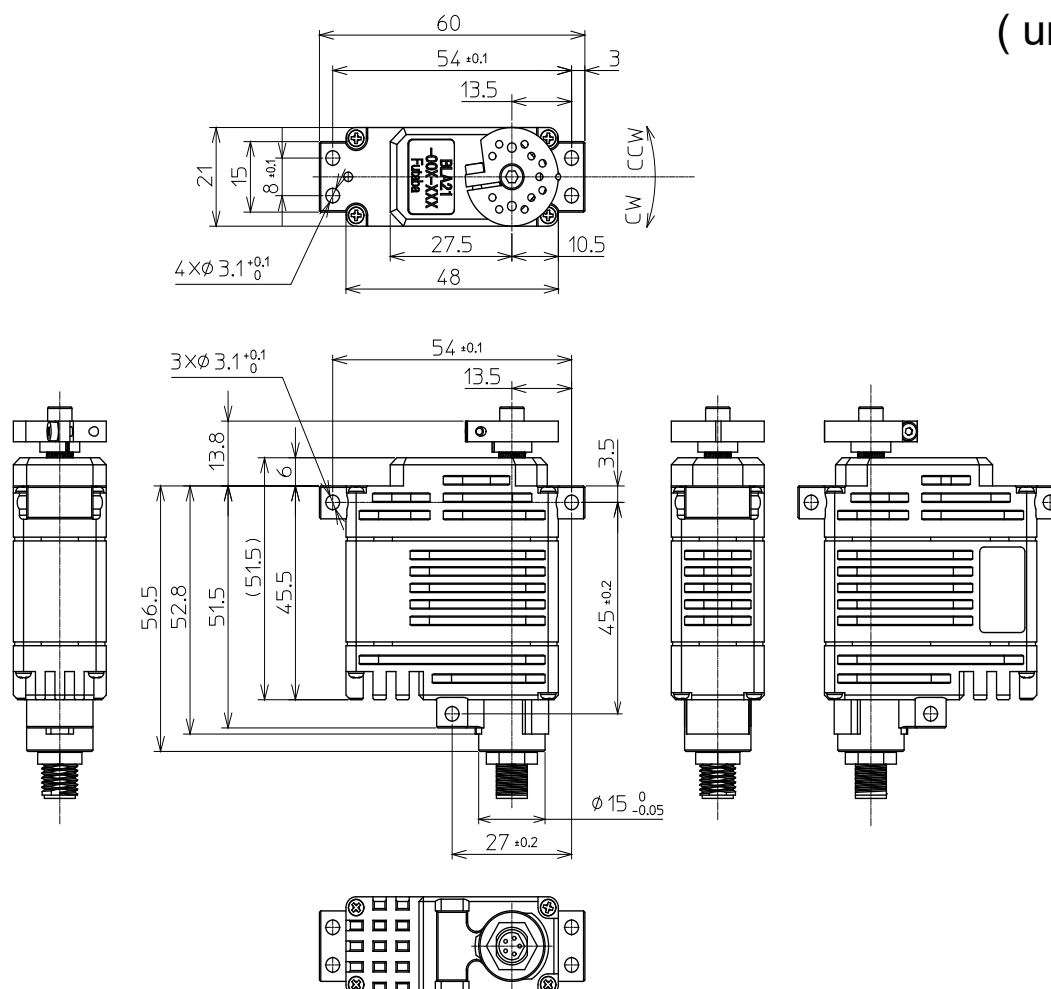

Without Servo Horn

Servo Horn

OUTPUT SHAFT

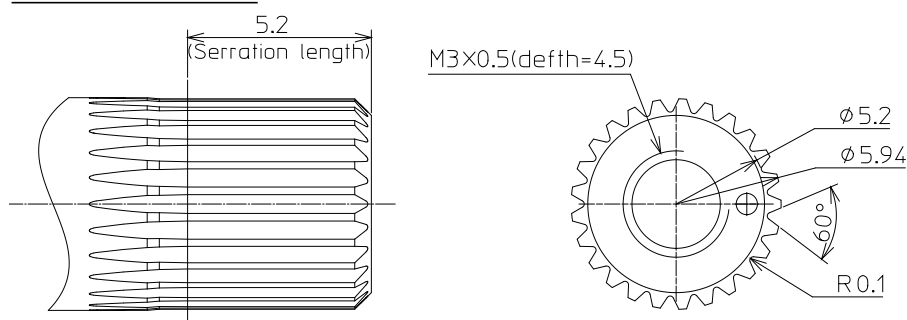


Sarretion Size

Standard Diameter : ϕ 6
Angle : 60 $^\circ$
Tooth : 25

Specifications for CAN BUS signals

Item		Specification				Remarks	
Communication Interface		CAN BUS				Protocol :	DroneCAN v1
						Baud Rate :	1 Mbps
						Sample Point:	87.5 %
						NodeID:	1 ~ 127
Operating mode (CAN BUS)	Angle control (Absolute)	-180.0	~	+179.9	°	The position within this range is absolute and can be recognized by the servo even after power-off. The position commands within this range are uniquely identified. For accuracy, see "Speed with no load (Speed control mode)". Resolution is 0.1°.	
	Angle control	-36,000,000.0	~	+36,000,000.0	°	The servo can accept position commands over 360°, but will lose multi-turn information when switched off, recognizing only the absolute position within 360°. Resolution is 0.1°.	
	Speed control	-300	~	+300	min ⁻¹	This mode is for continuous servo rotation, with speeds ranging within 300min ⁻¹ . Speed settings can be adjusted via CANBUS and a Futaba program tool. Refer to "Speed with no load (Speed control mode)" for actual speed details.	
	Torque control	-100	~	+100	%	Maximum torque at 28.0V supply voltage is 100%. Refer to "Max Torque".	

Connector specifications

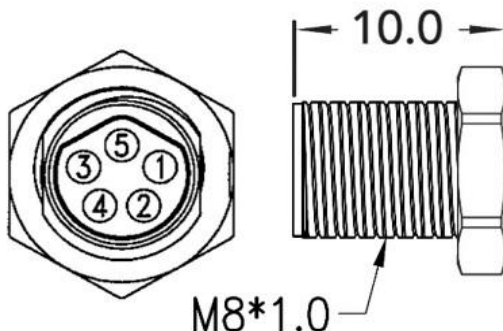Item		Specification		Remarks	
Cable		Shielded Cable(Detachable)		400	mm
				15.75	inch
Cable bending radius		78	mm		
Connector	Manufacture	ODS Electronics Co., Ltd.			
	Type	MMEPM05MCC-SHS7001			
	Matching	MAEAF05FCC-SRC7000 etc.			
Pin Assignment		Pin No.	Assignment	Cable Color	
		①	Battery(+)	Brown	
		②	Battery(-)	White	
		③	CAN-H	Blue	
		④	CAN-L	Black	
		⑤	Case Shield Line	Drain	
Pin Layout		<div></div>			

Model name system

BLA	21	-	28	U	-	A	0	1
Motor type BLA : Brushless Motor	Servo width 21 : 21mm *Gear box width		Power-supply voltage (Rated Voltage) 06 : 6.0~7.4V 12 : 11.1~14.8V 28 : 24.0~28.0V	Main signal type U : DroneCAN v1		Development code Optional function 1 0: Case shielded line and Battery(-) are separated. B: Supports PWM signals (Rotation direction: CW *) * Operation of PWM signal 1520 → 2120 μs.		Optional function 2 1: Straight connector type. 2: Side connector type.